

## The Hub of Lubricant Monitoring.

The Hub delivers more port versatility then anything else on the market. Having four lateral ports allows you to install BS&W Bowls, sample valves, drain valves, sight glasses, filter cart, etc. All at the same time. And with a high flow sample port, the Hub can tackle any sampling needs you have.




Distribuidor autorizado



## The Hub

Patent Pending Design

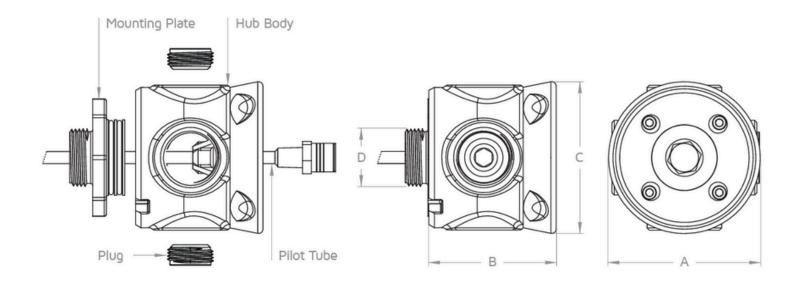

A - Width | B - Length | C - Diameter | D - Port Size

## Specifications

- Shipping Weight: 3.5 lbs. (for qty. 1)
- Recommended Temperature Range: Range is -13°F to +400°F
- Recommended PSI: 500 psi working and 125 psi for sampling
- Body Material: Heavy-duty powder-coated cast aluminum and zinc plated steel
- Pilot Tube: 1/4" Stainless steel, 12" long
- Sample Port: High flow, easy access with shielded design
- Easy Install: Hub Body is easily attached with supplied bolts and can be adjusted every 45-degress to achieve optimal orientation
- Lateral Ports: (2) 1" NPT and (2) 3/4" NPT, Includes
  (4) low profile plugs for sealing lateral ports when not in use and installation hex key is included

Description	Part Number	А	В	С	D
3/4″ NPT	HUB.075NPT	3.5	2.9	3.5	.75
1" NPT	HUB.100NPT	3.5	2.9	3.5	1.0
1 1/4" NPT	HUB.125NPT	3.5	2.9	3.5	1.25
1 1/2" NPT	HUB.150NPT	3.5	2.9	3.5	1.5
3/4" BSPP	HUB.075BSPP	3.5	2.9	3.5	.75
1" BSPP	HUB.100BSPP	3.5	2.9	3.5	1.0



Distribuidor autorizado